

ZULJANA'S OPEN FRAME TOUCHSCREEN MONITORS ZL215TMCAPOF

OPEN FRAME COMMERCIAL TOUCH SCREEN MONITORS


Zuljana Open Frame Touchscreen Monitors are the perfect choice for commercial as well as organization applications. The Open Frame Touchscreen Monitors capacitive 10-finger multitouch panel brings an easy making use of experience for a wide variety of applications.

When it involves considerable ease, reliability, durability, and user-friendliness, it will undoubtedly be the advantage of Zuljana open frame touchscreen monitors displays.



Open Frame Touchscreen Monitors Features

- ▶ Driver support for all the current operating syst
- ▶ A+ quality LED backlight panels
- ▶ 10-Finger-Multi Touch Capacitive Touch Panel
- ▶ Patented IP65 front with silicon seal
- ▶ The most common video connectors available
- ▶ High resolution LCD Panels
- ▶ Reinforced front glass
- ▶ 1 year guarantee

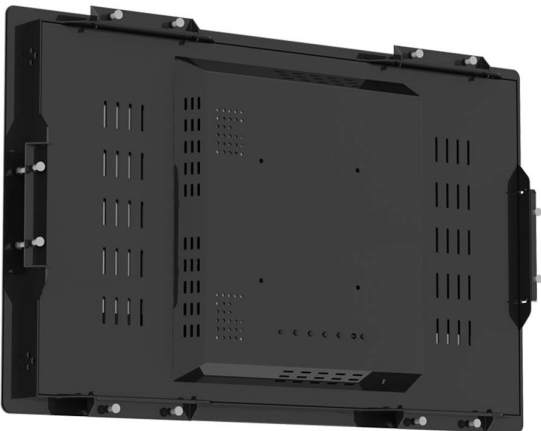

Ordering information

21.5" Open Frame Capacitive Touch Screen Monitor

IP Rating

IP65 Front / IP40 Back

LCD Panel

Screen Diagonal (Inch/cm)	21.5/54.69
Active Display Area(cm)	47.70×26.80
Aspect Ratio	16:9
Physical Resolution	1920×1080
Maximum showable resolution	1920×1200
Colours Displayed	16.7M
Brightness (cd/m2)	1000
Contrast	1000:1
Typical Reaction Time Tr/ Tf (ms)	7/7
Visual Angle Horizontal / vertical (°)	178/178
Backlight/Backlight Lifetime (hours)	LED / 100,000

Touch Panel

Touch Technology	Projected Capacitive 10-point Multitouch
Touch Panel Drivers	Windows; Linux; Mac; Android
Touch Life (Contacts)	Unlimited
Surface Hardness	7H
Surface Treatment	Anti-glare optional
Glass Strengthening	Tempered glass

Product Name

21.5" Open Frame Capacitive Touch Screen Monitor

Model Number


ZL215TMCAPOF

Operation/Mechanical

Operating Temperature (°C)	-10 - +60
Humidity Range (RH)	10%-90%
Net Weight(Kg)	5.00
Gross Weight(Kg)	7.30 (incl. cartonage)
Housing Material	Aluminum
Housing(mm)L x W x H	527.9 × 328.0 × 51.1
Cut-out required (mm) L × H	506.0 × 314.0
Amount of clamps required	8
(optional) Tape length required (mm)	1660.0 (2× 516.0 + 2× 314.0)
(optional) Amount of glue required (ml)	8.30
Mounting	VESA 100


External Connectors

Video	1x HDMI 1.3 (incl. HDCP) 1x DVI-D 1x VGA
Audio	1x PC-Audio
Touch Connector	1x USB
Connectors	1x Serial 1x 12V DC-In
Power Indicator	Green LED
Power Supply	100-240V ACDC active switching, 12V DC-Out
Working Power (V)	12
Working Power (w)	28
Stand-By Consumption	<1

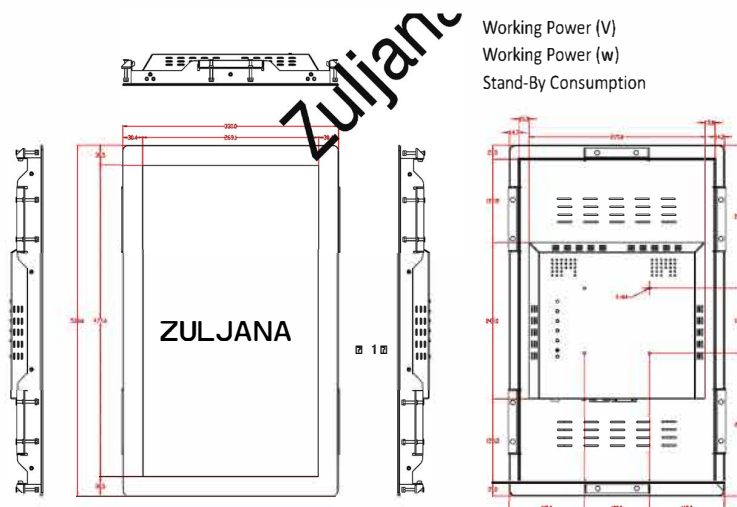

Learn more about **Zuljana** at baobao-industries.com

- +86 755 23775660
- +86 755 23779143
- sales@baobao-industries.com
- <https://www.baobao-industries.com>

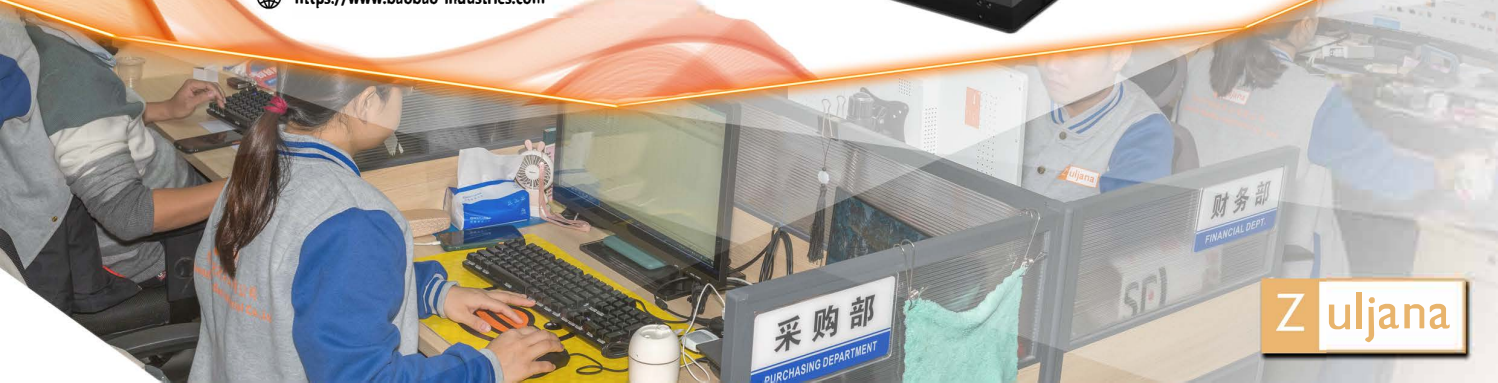

Zuljana